

# UNILIN Evola-Fibromax Compact MR black







Melamine faced, moisture-resistant MDF Compact board for interior and furniture, suitable for heavy-duty surfaces thanks to compact-density substrate


This product satisfies the surface specifications of a two-sided HPL compact board. UNILIN Evola-Fibromax Compact MR black can be used in humid conditions, service class 2 and is made from 100% recovered wood.

## Applications

- Interior design
- Horizontal application

## Properties

-  Extra compact-density MDF board (>1,000 kg/m<sup>3</sup>)
-  Melamine faced board
-  Moisture-resistant board
-  Black coloured board
-  100% recovered wood
-  Anti-bacterial

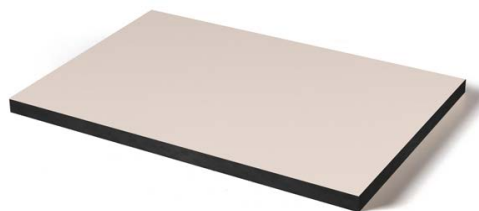

# UNILIN Evola-Fibromax Compact MR

## Applications

Applications with heavy-duty use of panels and suitable for any application in which bonded HPL Compact can be used – shop fitting, public spaces, hotels, work surfaces, office furniture, schools, hospitals, residential care facilities, lockers in sports facilities, cloakrooms, etc. The board is suitable for use in indoor environments.

Please note that the board cannot be used in environments in which there is prolonged and repeat contact with water (e.g. inside showers).

## Advantages

- Budget-friendly alternative to two-sided HPL Compact
- Simply installation of the board
- Can be installed with standard tools
- Higher return and optimisation options thanks to larger dimensions (2800 x 2070)
- Fewer joints thanks to larger dimensions (2800 x 2070)

## Technical specifications

Technical specifications can be found on [unilpanels.com](http://unilpanels.com).

## Finish

The melamine faced Fibromax Compact MR Black board can be combined with solid\* designs and a selection of wood and material designs from the UNILIN Decorative range. The wood and material designs are not only amazingly realistic, but the structure also feels wonderfully authentic. Designs are based on international trends, allowing creativity to run free when tackling interior projects.

\*does not apply to MST (supermat) references

## Available dimensions and thicknesses

The standard size is 2800x2070 mm and the standard thickness is 6,10 and 13 mm. The designs from the stock range can be collected within 5 working days as of 1 piece. The other designs are part of the fast lane service range and can be collected within 10 or 15 working days from 2 pieces.

Thicknesses of 8 mm and 12 mm are available on request from 1 full truck load.